Magazine unloader with a platform for one magazine **VEGO** Dynamic

VEGO AES 01



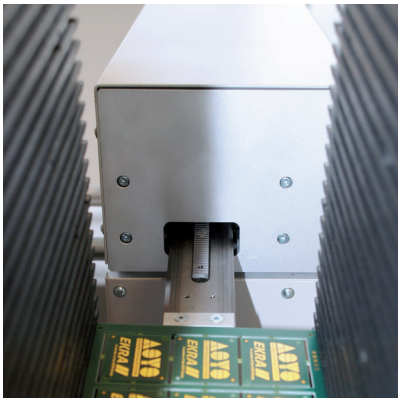

Description
The unit uses an electrically driven pusher to slide the PCB's out of the magazine and onto the receiving conveyor of the following unit. The magazines are changed manually.

Features
_ Magazine platform vertically aligned using a tension clamp
_ Sensor recognition of magazine change and automatic reset
_ Pusher is adjusted using a tension clamp located on the middle of the magazine

Options
_ Transport height 950 mm ± 50 mm
_ Magazine adaptation
_ Multiple output
_ Re-insertion mechanism
_ Hybrid magazine

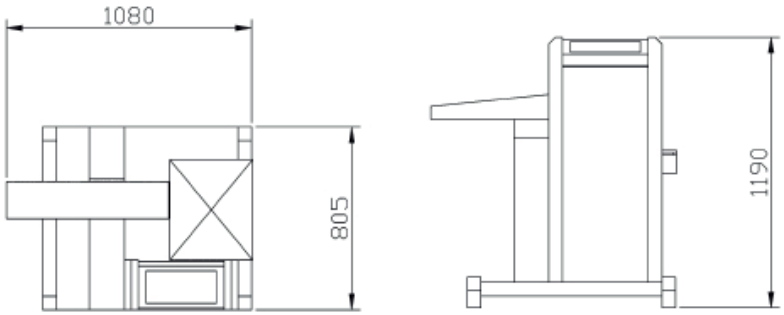

VEGO AES 01

Machine Configuration	
Transport height	850 mm ± 50 mm
Max. transport width	**460 mm**
Interface	SMEMA, Siemens
Transfer direction	from left to right
Operating side	Front of the machine
Fixed rail	Front of the machine
Magazine Size	
Magazine length	535 mm
Magazine width	530 mm
Magazine heigth	568 mm
Slot spacing	5- 20 mm
Buffer spacing	1- 50 Slots
Magazine weight max.	30 kg
Panel Dimensions	
Panel length	70 to 460 mm
Panel width	50 to 460 mm
Panel thickness	0.8 to 4.5 mm
Component clearance	± 40 mm
Panel weight	to 3 kg
Installation Requirements	
Power supply	230 V / 115 V, 50 / 60 Hz, ± 10%
Power supply system	L1 + N + PE
Power consumption	0,75 kW
Machine Description	
Length x Width x Height [a)]	1080 x 805 x 1190 mm
Netto weight	170 kg
Noise Level	< 75 dB
Upgrades	
Machine networking via IC Net	

a) other dimensions on request

ASYS GROUP

ASYS Automatisierungssysteme GmbH
Benzstrasse 10,
89160 Dornstadt, Germany
Tel (+49) 7348 9855 0
Fax (+49) 7348 9855 91
info@asys.de

For more information visit
www.asys-group.com

Subject to change without notice.
Some general descriptions and performance characteristics may not be applicable to all products. Technical specifications are subject to change without notice. Only features and technical data provided in purchasing contract are legally binding.

Printed in Germany